

Undercounters and Worktops

TUC & TWT

English






Contents

- 2 About True
- 4 Undercounters
and Worktops





The industry's most complete refrigeration source.
True.

True is the world's leading supplier of quality commercial refrigeration. Founded over 70 years ago in Missouri, USA, True continues to flourish around the globe by offering the best possible environment to store your food products.





True, Your Energy Efficient Future... Naturally



Hydrocarbon has less than **THREE** Global Warming Potential (R134A = 1,430)



Naturally Occurring Refrigerant = Environmentally Friendly



Up to 15% more efficient than R134A and R404A



ZERO Ozone Depletion Potential



Sustainability

Over 70 Years of commercial refrigeration focus have enabled True to become experts in the design and development of our systems. While energy efficiency has always been part of our design process, we continue to utilize new technologies to improve our systems to be the most efficient in the industry, without sacrificing the performance that ultimately provides food safety for our customers throughout the World.

True continually searches for environmentally friendly components and processes to help reduce our own and our customers' carbon footprint. Initiatives include offering a natural refrigerant and CFC free, polyurethane, high-density insulation that provides unparalleled strength, rigidity, and increase to an already industry-exceeding insulation factor, with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

Energy efficiency without compromise.



Natural Refrigerant is standard on most models.



Undercounters and Worktops

True's undercounters and worktops are designed with enduring quality that protects your long-term investment.

Manufactured using the highest quality materials and components, True's undercounters and worktops provide the most consistent temperature, lower utility costs and exceptional food safety while delivering the best value in today's foodservice marketplace.







Undercounters

Exterior

All stainless steel front, top and sides. Aluminum finished back.



Coated
evaporators



Robust
components



Efficient
motors



Digital
display



Stainless
steel

Doors

Swing doors are self-closing with 90° degree stay open feature.

Interior

Attractive aluminum sides and top, coved corners and stainless steel floor.

Insulation

Entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

Shelves

Adjustable, heavy-duty PVC-coated wire shelves.

TUC-27-HC

Solid Door Undercounter



TUC-24-HC



TUC-36-HC





















TUC-48-HC



TUC-60D-4

Undercounters

TUC: Refrigerators

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TUC-24-HC 	1 / 0	2	610 x 627 x 802	94	71	A	395
TUC-24G-HC~FGD01 	1 / 0	2	610 x 627 x 802	98	75	—	—
TUC-27-HC 	1 / 0	2	702 x 766 x 839	143	89	A	451
TUC-27-IP-HC 	1 / 0	2	702 x 766 x 810	143	84	A	451
TUC-27G-HC~FGD01 	1 / 0	2	702 x 766 x 839	185	93	—	—
TUC-27G-IP-HC~FGD01 	1 / 0	2	702 x 766 x 810	144	89	—	—
TUC-27D-2-HC 	0 / 2	—	702 x 766 x 839	39	103	A	451
TUC-27D-2-IP-HC 	0 / 2	—	702 x 766 x 810	39	96	A	451
TUC-36-HC 	2 / 0	4	924 x 766 x 839	200	107	B	594
TUC-36-IP-HC 	2 / 0	4	924 x 766 x 810	—	105	—	—
TUC-44	1 / 0	2	1131 x 820 x 839	—	132	—	—
TUC-48-HC 	2 / 0	4	1229 x 766 x 839	278	118	A	602
TUC-48-IP-HC 	2 / 0	4	1229 x 766 x 810	278	118	A	602
TUC-48G-HC~FGD01 	2 / 0	4	1229 x 766 x 839	265	130	—	—
TUC-48G-IP-HC~FGD01 	2 / 0	4	1229 x 766 x 810	265	130	—	—
TUC-48D-2-HC 	1 / 2	2	1229 x 766 x 839	158	141	B	602
TUC-48D-2-IP-HC 	1 / 2	2	1229 x 766 x 810	169	139	A	548
TUC-48D-4-HC 	0 / 4	—	1229 x 766 x 839	70	150	B	602
TUC-48D-4-IP-HC 	0 / 4	—	1229 x 766 x 810	70	150	B	602
TUC-60	2 / 0	4	1534 x 766 x 839	—	162	—	—
TUC-60-IP	2 / 0	4	1534 x 766 x 810	—	155	—	—
TUC-60D-2	1 / 2	2	1534 x 766 x 839	—	202	—	—
TUC-60D-2-IP	1 / 2	2	1534 x 766 x 810	—	202	—	—
TUC-60D-4	0 / 4	—	1534 x 766 x 839	—	182	—	—
TUC-60D-4-IP	0 / 4	—	1534 x 766 x 810	—	173	—	—
TUC-60-32	2 / 0	4	1531 x 820 x 839	—	166	—	—
TUC-60-32D-2	1 / 2	2	1531 x 820 x 839	—	166	—	—
TUC-67	2 / 0	4	1709 x 820 x 839	—	175	—	—
TUC-67D-4	0 / 4	—	1709 x 820 x 839	—	218	—	—
TUC-72	3 / 0	6	1839 x 766 x 839	—	184	—	—
TUC-93	3 / 0	6	2369 x 820 x 839	—	248	—	—
TUC-93D-2	2 / 2	4	2369 x 820 x 839	—	261	—	—
TUC-93D-4	1 / 4	2	2369 x 820 x 839	—	289	—	—
TUC-93D-6	0 / 6	—	2369 x 820 x 839	—	309	—	—

†DEPTH DOES NOT INCLUDE 26MM FOR REAR BUMPERS.

†DEPTH DOES NOT INCLUDE AN ADDITIONAL 7MM FOR FRONT BUMPER ON DEEP UNITS.

†DEPTH DOES NOT INCLUDE 4MM FOR DOOR HANDLE ON GLASS DOOR MODELS.

NOTE: FOR DOOR/DRAWER COMBO MODELS, DOOR OR DRAWER ASSEMBLY CAN BE LOCATED IN ANY SECTION OF THE CABINET. LOCATION OF DOOR/DRAWERS MUST BE INDICATED AT TIME OF ORDERING.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT



TUC-24G-HC~FGD01









TUC-67



TUC-93D-2



TUC: Freezers

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TUC-24F-HC 	1 / 0	2	610 x 627 x 802	94	75	C	1300
TUC-27F-HC 	1 / 0	2	702 x 766 x 839	143	87	C	1472
TUC-27F-LP-HC 	1 / 0	2	702 x 766 x 810	143	91	C	1472
TUC-27F-D-2-HC 	0 / 2	—	702 x 766 x 839	39	100	D	1472
TUC-48F-HC 	2 / 0	4	1229 x 766 x 839	249	125	D	2139
TUC-48F-LP-HC 	2 / 0	4	1229 x 766 x 810	249	125	D	2139

†DEPTH DOES NOT INCLUDE 26MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT



Stacking Collar

STACKING COLLAR

DESCRIPTION	PART NUMBER
TUC-27-HC, 27F-HC	872963

True's stacking collar provides a space-efficient freezer and refrigerator combination in a 699mm x 762mm footprint



TUC-24F-HC











TUC-48F-HC



TUC-27F-D-2-HC

Undercounters

TUC~SPEC3: Refrigerators

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TUC-24HC~SPEC3 	1 / 0	2	610 x 627 x 802	94	71	A	395
TUC-27HC~SPEC3 	1 / 0	2	702 x 740 x 839	143	84	A	451
TUC-27D-2HC~SPEC3 	0 / 2	—	702 x 740 x 839	39	103	A	451
TUC-27G-HC~SPEC3 	1 / 0	2	702 x 740 x 839	185	93	—	—
TUC-48HC~SPEC3 	2 / 0	4	1229 x 740 x 839	247	139	B	673
TUC-48D-2HC~SPEC3 	1 / 2	2	1229 x 740 x 839	169	141	B	673
TUC-48D-4HC~SPEC3 	0 / 4	—	1229 x 740 x 839	72	150	B	673
TUC-48G-HC~SPEC3 	2 / 0	4	1227 x 751 x 839	265	143	—	—
TUC-60~SPEC3	2 / 0	4	1534 x 740 x 839	—	162	—	—
TUC-60D-2~SPEC3	1 / 2	2	1534 x 740 x 839	—	173	—	—
TUC-60D-4~SPEC3	0 / 4	—	1534 x 740 x 839	—	182	—	—
TUC-67~SPEC3	2 / 0	4	1709 x 820 x 839	—	175	—	—
TUC-67D-4~SPEC3	0 / 4	—	1709 x 820 x 839	—	218	—	—
TUC-72~SPEC3	3 / 0	6	1839 x 740 x 839	—	184	—	—
TUC-93~SPEC3	3 / 0	6	2369 x 820 x 839	—	248	—	—
TUC-93D-2~SPEC3	2 / 2	4	2369 x 820 x 839	—	261	—	—
TUC-93D-4~SPEC3	1 / 4	2	2369 x 820 x 839	—	289	—	—
TUC-93D-6~SPEC3	0 / 6	—	2369 x 820 x 839	—	309	—	—

† DEPTH DOES NOT INCLUDE 39 MM FOR DOOR HANDLES.




† DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

NOTE: FOR DOOR/DRAWER COMBO MODELS, DOOR OR DRAWER ASSEMBLY CAN BE LOCATED IN ANY SECTION OF THE CABINET. LOCATION OF DOOR/DRAWERS MUST BE INDICATED AT TIME OF ORDERING.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT

TUC~SPEC3: Freezers

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TUC-27F-HC~SPEC3 	1 / 0	2	702 x 740 x 839	143	96	C	1391
TUC-27F-D-2HC~SPEC3 	0 / 2	—	702 x 740 x 839	39	100	D	1472
TUC-48F-HC~SPEC3 	2 / 0	4	1229 x 740 x 839	249	125	D	2139

† DEPTH DOES NOT INCLUDE 39 MM FOR DOOR HANDLES.

† DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT



TUC-27HC~SPEC3



TUC-48HC~SPEC3



TUC-48D-2HC~SPEC3



TUC-27F-D-2HC~SPEC3



Worktops

Exterior

All stainless steel front, top and sides. Aluminum finished back.



Coated
evaporators



Robust
components



Efficient
motors



Digital
display



Stainless
steel

Doors

Swing doors are self-closing with 90° degree stay open feature.

Interior

Attractive aluminum sides and top, coved corners and stainless steel floor.

Insulation

Entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

Shelves

Adjustable, heavy-duty PVC-coated wire shelves.

TWT-60

Solid Door Worktop Table



TWT-27-HC



TWT-48-HC









TWT-44



TWT-72

Worktops

TWT: Refrigerators

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TWT-27HC 	1 / 0	2	702 x 766 x 1007	143	89	A	451
TWT-27D-2HC 	0 / 2	—	702 x 766 x 1007	39	98	A	451
TWT-36-HC 	2 / 0	4	924 x 766 x 1007	200	109	B	594
TWT-44	1 / 0	2	1131 x 823 x 1007	—	130	—	—
TWT-48-HC 	2 / 0	4	1229 x 766 x 1007	278	128	A	602
TWT-48D-2HC 	1 / 2	2	1229 x 766 x 1007	169	150	B	673
TWT-48D-4HC 	0 / 4	—	1229 x 766 x 1007	70	150	B	602
TWT-60	2 / 0	4	1534 x 766 x 1007	—	157	—	—
TWT-60D-2	1 / 2	2	1534 x 766 x 1007	—	157	—	—
TWT-60D-4	0 / 4	—	1534 x 766 x 1007	—	186	—	—
TWT-60-32	2 / 0	4	1531 x 823 x 1007	—	164	—	—
TWT-60-32D-2	1 / 2	2	1531 x 823 x 1007	—	180	—	—
TWT-67	2 / 0	4	1709 x 823 x 1007	—	191	—	—
TWT-67D-4	0 / 4	—	1709 x 823 x 1007	—	225	—	—
TWT-72	3 / 0	6	1839 x 766 x 1007	—	184	—	—
TWT-93	3 / 0	6	2369 x 823 x 1007	—	248	—	—
TWT-93D-2	2 / 2	4	2369 x 823 x 1007	—	261	—	—
TWT-93D-4	1 / 4	2	2369 x 823 x 1007	—	277	—	—
TWT-93D-6	0 / 6	—	2369 x 823 x 1007	—	309	—	—

†DEPTH DOES NOT INCLUDE 26MM FOR REAR BUMPERS.

†DEPTH DOES NOT INCLUDE AN ADDITIONAL 7MM FOR FRONT BUMPER ON DEEP UNITS.

NOTE: FOR DOOR/DRAWER COMBO MODELS, DOOR OR DRAWER ASSEMBLY CAN BE LOCATED IN ANY SECTION OF THE CABINET. LOCATION OF DOOR/DRAWERS MUST BE INDICATED AT TIME OF ORDERING.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT



TWT-48D-2-HC



TWT-60D-2



TWT-60D-4



TWT: Freezers

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TWT-27F-HC	1 / 0	2	702 x 766 x 1007	143	96	C	1472
TWT-48F-HC	2 / 0	4	1229 x 766 x 1007	249	130	D	2139

†DEPTH DOES NOT INCLUDE 26MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

HYDROCARBON REFRIGERANT

TWT~SPEC3: Refrigerators

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TWT-27HC~SPEC3	1 / 0	2	702 x 740 x 1007	143	89	A	451
TWT-27D-2HC~SPEC3	0 / 2	—	702 x 740 x 1007	39	89	A	451
TWT-36HC~SPEC3	2 / 0	4	924 x 740 x 1007	—	109	—	—
TWT-48HC~SPEC3	2 / 0	4	1229 x 740 x 1007	247	128	B	673
TWT-48D-2HC~SPEC3	1 / 2	2	1229 x 740 x 1007	169	150	—	—
TWT-48D-4HC~SPEC3	0 / 4	—	1229 x 740 x 1007	72	150	—	—
TWT-60~SPEC3	2 / 0	4	1534 x 740 x 1007	—	157	—	—
TWT-60D-2~SPEC3	1 / 2	2	1534 x 740 x 1007	—	157	—	—
TWT-60D-4~SPEC3	0 / 4	—	1534 x 740 x 1007	—	186	—	—
TWT-67~SPEC3	2 / 0	4	1709 x 820 x 1007	—	191	—	—
TWT-67D-4~SPEC3	0 / 4	—	1709 x 820 x 1007	—	225	—	—
TWT-72~SPEC3	3 / 0	6	1839 x 740 x 1007	—	184	—	—
TWT-93~SPEC3	3 / 0	6	2369 x 820 x 1007	—	248	—	—
TWT-93D-2~SPEC3	2 / 2	4	2369 x 820 x 1007	—	261	—	—
TWT-93D-4~SPEC3	1 / 4	2	2369 x 820 x 1007	—	277	—	—
TWT-93D-6~SPEC3	0 / 6	—	2369 x 820 x 1007	—	309	—	—

† DEPTH DOES NOT INCLUDE 39 MM FOR DOOR HANDLES.

† DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

NOTE: FOR DOOR/DRAWER COMBO MODELS, DOOR OR DRAWER ASSEMBLY CAN BE LOCATED IN ANY SECTION OF THE CABINET. LOCATION OF DOOR/DRAWERS MUST BE INDICATED AT TIME OF ORDERING.

All dimensions rounded up to the nearest whole millimeter.

HYDROCARBON REFRIGERANT



TWT-27F-HC





TWT-48F-HC



TWT-93D-6~SPEC3

Worktops

TWT~SPEC3: Freezers

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TWT-27F-HC~SPEC3 	1 / 0	2	702 x 740 x 1007	144	96	—	—
TWT-48F-HC~SPEC3 	2 / 0	4	1229 x 740 x 1007	249	130	D	2139

† DEPTH DOES NOT INCLUDE 39 MM FOR DOOR HANDLES.
† DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT


SPEC3 FEATURES



Stainless steel liner



All metal working spec door handle

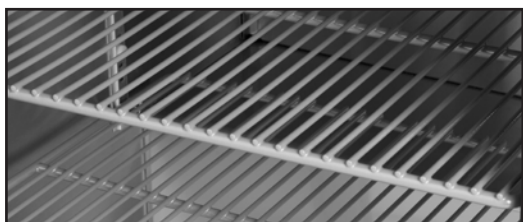

PVC coated grey wire shelves



Exterior digital temp display



Door lock



Spec Series® logo



TWT-27F-HC~SPEC3



TWT-48D-4-HC~SPEC3



TWT-67~SPEC3



TWT-48F-HC~SPEC3







True manufactures the
widest range of professional
refrigeration products.

www.truemfg.com





Food Preparation Tables
Undercounters
Worktops
Traditional Reach-Ins
Underbar Refrigeration
Glass Door Merchandisers
Vertical Air Curtains
Spec Series®
Chef Bases



At True we pride ourselves on manufacturing the best refrigeration products in the world. But we also understand the importance of ensuring our after sales support matches the quality of our products.

All True customer support personnel are highly-trained, professional and friendly: their aim is to offer our customers exemplary after sales service and support.

Every customer enjoys a dedicated representative to handle their account personally. This ensures all customer enquiries are dealt with quickly and efficiently.

In the event you require technical support, our locally-based, True appointed service partners are able to offer prompt assistance, minimizing downtime and disruption to your operation.

TRUE REFRIGERATION - EUROPE

US OFFICE

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • USA
US Tel: +1 636.240.2400 • US Fax: +1 636.272.7546
US Toll Free: +1 800.325.6152 • Canada Toll Free to USA: +1 800.860.8783
Email: trueintl@truemfg.com

UK OFFICE

Fields End Road • Goldthorpe • Nr. Rotherham, South Yorkshire, S63 9EU • UK
Tel: +44 (0) 800.783.2049 • Freephone to USA: 0 800.894.928
Email: trueeurope@truemfg.com

EU OFFICE

Hauptstr. 269 • 79650 Schopfheim • Germany
Tel: +49 (0) 7622.6883.0 • Fax: +49 (0) 7622.6883.499
Email: trueeurope@truemfg.com

AUSTRALIA OFFICE

6B Phiney Place • Ingleburn, NSW 2565 • Australia
Tel: +61 2.9618.9999 • Fax: +61 2.9618.7259
Email: trueintl@truemfg.com

MEXICO OFFICE

Tel: +52.55.5804.6343/6344 • Fax: +52 555 804 6342
Toll free from U.S.A. and Mexico: +1 800.325.6152
Email: trueintl@truemfg.com

CHILE OFFICE

Av. Las Condes, # 7009, Local 1º • Comuna Las Condes — Santiago
Tel: +56 232.133.600
Email: trueintl@truemfg.com